

Dealer Name: \_\_\_\_\_ Account# \_\_\_\_\_ Date: \_\_\_\_\_

Submitted by: \_\_\_\_\_ Phone: \_\_\_\_\_ Email: \_\_\_\_\_

Builder, Lot# & Sub Division: \_\_\_\_\_

Street Address: \_\_\_\_\_


City: \_\_\_\_\_ State \_\_\_\_\_ Zip Code \_\_\_\_\_ P.O.# \_\_\_\_\_

Check here if jobsite delivery \$125.00 delivery fee if delivering to a jobsite, not available in all areas.

Jobsite Contact: \_\_\_\_\_ Phone: \_\_\_\_\_

**CHECK PANEL OPERATION BELOW - Panel not to scale**


Net Sizes (Check One)	Rough Opening	Jamb Depth
<b>3 PANEL FOLDING DOOR - Max Height is 8 ft</b>		
107 9/16" x 95 1/2"	108 1/16" x 96	5 1/4"
119 9/16" x 95 1/2"	120 x 1/16" x 96	5 1/4"

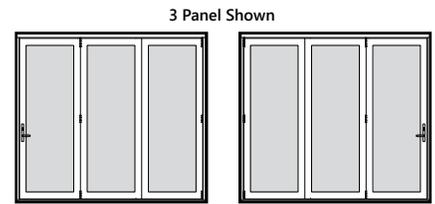


Left Outswing Right Outswing

NOTE: 27.75" MAX SQUARE FEET

**3.0.3 Outswing**

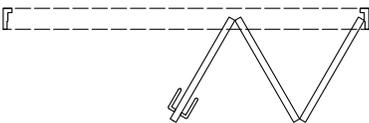

**3.3.0 Outswing**

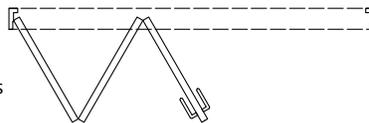

Exterior panels not to scale


**CHECK PANEL OPERATION BELOW - Panel not to scale**

Net Sizes (Check One)	Rough Opening	Jamb Depth
<b>3 PANEL FOLDING DOOR - Max Height is 8 ft</b>		
108 9/16" x 95 1/2"	109 1/16" x 96	5 1/4"
120 9/16" x 95 1/2"	121 x 1/16" x 96	5 1/4"


**CHECK PANEL OPERATION ABOVE & INDICATE RO SIZE**

Custom Door Size	Rough Opening	Jamb Depth	Net Deduct 1/2" Width & Height
<b>CUSTOM SIZED 3 PANEL FOLDING DOOR - Max Height is 8 ft</b>			5 1/4"

**3.1.2 Outswing**



**3.2.1 Outswing**

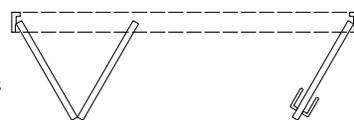

Exterior panels not to scale

**Standard**

**Optional**



Release lever



Straight



Flared

<b>Int/Ext Color:</b>	White	Beige	Black
<b>Exterior over White:</b>	Terra Tone	Bronze-Matte	Black-Matte
<b>Frame Style:</b>	Block	1" Fin	1 3/8" Fin
<b>Sill Color:</b>	Clear Anodized	Bronze Anodized	
<b>Sill Type:</b>	Standard	ADA*	

<b>Handle Style:</b>	Straight (standard)	Flared (optional)	
<b>Handle Color:</b>	White	Brushed Chrome	Black
<b>Keyed Handle:</b>	No-Keyed	Keyed	Key Alike
<b>Release Lever:</b>	White	Brushed Chrome	Black
<b>Hinge:</b>	Brushed Stainless	Bronze Powder Coat	
<b>Glass:</b>	EC+/Clear	Other	_____

\*ADA and Zero U-Channel "flush" sill options should not be used in areas where water may come in direct contact with the door or landing area. See warranty for exclusions.

**Additional charges may apply:** Jobsite delivery is not available in all areas. Warranty is subject to following the provided installation instructions and using an adequate header for support. Cascade Windows does not warrant the installation of the product, or adjustment related requests.

**NOTE:** Regardless of sill type, the foundation must support the sill height variance requirement of 1/16" maximum across the entire sill length. In conjunction with the sill, the framing of the rough opening must be installed plumb, square, and true within 3/16". The header must be flat and designed to uphold the deflection requirement of not more than 1/8" over the entire length of the unsupported span when fully loaded. Side jambs and pocket framing must be constructed of a continuous flat solid surface that is plumb. The folding door and window system require an additional structural load calculation for the header, equal or greater than 7 pounds per square foot of rough opening, with same deflection criteria above. Cascade Windows does not warrant the installation of the product, or adjustment related requests.

Dealer Name: \_\_\_\_\_ Account# \_\_\_\_\_ Date: \_\_\_\_\_

Submitted by: \_\_\_\_\_ Phone: \_\_\_\_\_ Email: \_\_\_\_\_

Builder, Lot# & Sub Division: \_\_\_\_\_

Street Address: \_\_\_\_\_


City: \_\_\_\_\_ State \_\_\_\_\_ Zip Code \_\_\_\_\_ P.O.# \_\_\_\_\_

Check here if jobsite delivery \$125.00 delivery fee if delivering to a jobsite, not available in all areas.

Jobsite Contact: \_\_\_\_\_ Phone: \_\_\_\_\_

**CHECK PANEL OPERATION BELOW - Panel not to scale**

Net Sizes (Check One)	Rough Opening	Jamb Depth
<b>4 PANEL FOLDING DOOR - Max Height is 8 ft</b>		
142 1/2" x 95 1/2"	143 x 96	5 1/4"




4 Panel Shown  
NOTE: 27.75" MAX SQUARE FEET

**4.0.4 Outswing**



**4.4.0 Outswing**




**CHECK PANEL OPERATION BELOW - Panel not to scale**

Net Sizes (Check One)	Rough Opening	Jamb Depth
<b>4 PANEL FOLDING DOOR - Max Height is 8 ft</b>		
143 1/2" x 95 1/2"	144 x 96	5 1/4"


**CHECK PANEL OPERATION ABOVE & INDICATE RO SIZE**

Custom Door Size	Rough Size Opening Only	Jamb Depth	Net Deduct 1/2" Width & Height
<b>CUSTOM SIZED 4 PANEL FOLDING DOOR - Max Height is 8 ft</b>			
		5 1/4"	


**4.1.3 Outswing**




**4.3P.1 Outswing**



**4.1P.3 Outswing**



**4.3.1P Outswing**



**Standard**

**Optional**



- Int/Ext Color:** White Beige Black
- Exterior over White:** Terra Tone Bronze-Matte Black-Matte
- Frame Style:** Block 1" Fin 1 3/8" Fin
- Sill Color:** Clear Anodized Bronze Anodized
- Sill Type:** Standard ADA\*

- Handle Style:** Straight (standard) Flared (optional)
- Handle Color:** White Brushed Chrome Black
- Keyed Handle:** No-Keyed Keyed Key Alike
- Release Lever:** White Brushed Chrome Black
- Hinge:** Brushed Stainless Bronze Powder Coat
- Glass:** EC+/Clear Other \_\_\_\_\_

\*ADA and Zero U-Channel "flush" sill options should not be used in areas where water may come in direct contact with the door or landing area. See warranty for exclusions.

**Additional charges may apply:** Jobsite delivery is not available in all areas. Warranty is subject to following the provided installation instructions and using an adequate header for support. Cascade Windows does not warrant the installation of the product, or adjustment related requests.

**NOTE:** Regardless of sill type, the foundation must support the sill height variance requirement of 1/16" maximum across the entire sill length. In conjunction with the sill, the framing of the rough opening must be installed plumb, square, and true within 3/16". The header must be flat and designed to uphold the deflection requirement of not more than 1/8" over the entire length of the unsupported span when fully loaded. Side jambs and pocket framing must be constructed of a continuous flat solid surface that is plumb. The folding door and window system require an additional structural load calculation for the header, equal or greater than 7 pounds per square foot of rough opening, with same deflection criteria above. Cascade Windows does not warrant the installation of the product, or adjustment related requests.

Dealer Name: \_\_\_\_\_ Account# \_\_\_\_\_ Date: \_\_\_\_\_

Submitted by: \_\_\_\_\_ Phone: \_\_\_\_\_ Email: \_\_\_\_\_

Builder, Lot# & Sub Division: \_\_\_\_\_

Street Address: \_\_\_\_\_

City: \_\_\_\_\_ State \_\_\_\_\_ Zip Code \_\_\_\_\_ P.O.# \_\_\_\_\_



Check here if jobsite delivery \$125.00 delivery fee if delivering to a jobsite, not available in all areas.

Jobsite Contact: \_\_\_\_\_ Phone: \_\_\_\_\_

**CHECK PANEL OPERATION BELOW - Panel not to scale**


Net Sizes (Check One)	Rough Opening	Jamb Depth
<b>5 PANEL FOLDING DOOR - Max Height is 8 ft</b>		
143 1/2" x 95 1/2"	144 x 96"	5 1/4"
177 7/16" x 95 1/2"	177 15/16" x 96"	5 1/4"
191 1/2" x 95 1/2"	192 x 96"	5 1/4"

**5.0.5 Outswing**

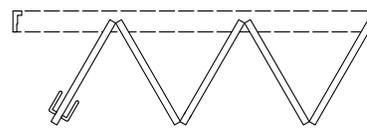

NOTE: 27.75" MAX SQUARE FEET

**5.5.0 Outswing**

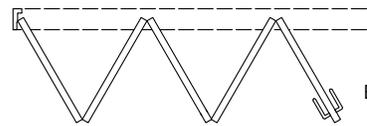

Exterior panels not to scale


**CHECK PANEL OPERATION BELOW - Panel not to scale**

Net Sizes (Check One)	Rough Opening	Jamb Depth
<b>5 PANEL FOLDING DOOR - Max Height is 8 ft</b>		
144 1/2" x 95 1/2"	145 x 96"	5 1/4"
178 7/16" x 95 1/2"	178 5/16" x 96"	5 1/4"


**CHECK PANEL OPERATION ABOVE & INDICATE RO SIZE**

Custom Door Size	Rough Size Opening Only	Jamb Depth	Net Deduct 1/2 Width & Height
<b>CUSTOM SIZED 5 PANEL FOLDING DOOR - Max Height is 8 ft</b>			
		5 1/4"	

**5.1.4 Outswing**

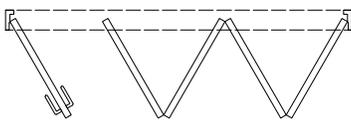


**5.4.1 Outswing**

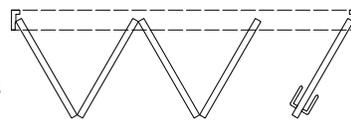


Exterior panels not to scale

**5.2.3 Outswing**




**5.3.2 Outswing**



**Standard**

**Optional**

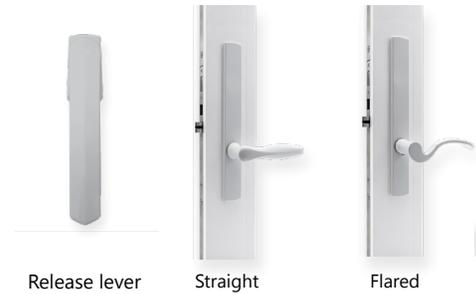

<b>Int/Ext Color:</b>	White	Beige	Black
<b>Exterior over White:</b>	Terra Tone	Bronze-Matte	Black-Matte
<b>Frame Style:</b>	Block	1" Fin	1 3/8" Fin
<b>Sill Color:</b>	Clear Anodized	Bronze Anodized	
<b>Sill Type:</b>	Standard	ADA*	

<b>Handle Style:</b>	Straight (standard)	Flared (optional)
<b>Handle Color:</b>	White	Brushed Chrome Black
<b>Keyed Handle:</b>	No-Keyed	Keyed Key Alike
<b>Release Lever:</b>	White	Brushed Chrome Black
<b>Hinge:</b>	Brushed Stainless	Bronze Powder Coat
<b>Glass:</b>	EC+/Clear	Other _____

\*ADA and Zero U-Channel "flush" sill options should not be used in areas where water may come in direct contact with the door or landing area. See warranty for exclusions.

**Additional charges may apply:** Jobsite delivery is not available in all areas. Warranty is subject to following the provided installation instructions and using an adequate header for support. Cascade Windows does not warrant the installation of the product, or adjustment related requests.

**NOTE:** Regardless of sill type, the foundation must support the sill height variance requirement of 1/16" maximum across the entire sill length. In conjunction with the sill, the framing of the rough opening must be installed plumb, square, and true within 3/16". The header must be flat and designed to uphold the deflection requirement of not more than 1/8" over the entire length of the unsupported span when fully loaded. Side jambs and pocket framing must be constructed of a continuous flat solid surface that is plumb. The folding door and window system require an additional structural load calculation for the header, equal or greater than 7 pounds per square foot of rough opening, with same deflection criteria above. Cascade Windows does not warrant the installation of the product, or adjustment related requests.

Dealer Name: \_\_\_\_\_ Account# \_\_\_\_\_ Date: \_\_\_\_\_

Submitted by: \_\_\_\_\_ Phone: \_\_\_\_\_ Email: \_\_\_\_\_

Builder, Lot# & Sub Division: \_\_\_\_\_

Street Address: \_\_\_\_\_


City: \_\_\_\_\_ State \_\_\_\_\_ Zip Code \_\_\_\_\_ P.O.# \_\_\_\_\_

Check here if jobsite delivery \$125.00 delivery fee if delivering to a jobsite, not available in all areas.

Jobsite Contact: \_\_\_\_\_ Phone: \_\_\_\_\_

**CHECK PANEL OPERATION BELOW - Panel not to scale**

Net Sizes (Check One)	Rough Opening	Jamb Depth
<b>6 PANEL FOLDING DOOR - Max Height is 8 ft</b>		
213 5/16" x 95 1/2"	213 13/16" x 96	5 1/4"




NOTE: 27.75" MAX SQUARE FEET

**6.3.3P Outswing**



Exterior panels not to scale

**6.3P.3 Outswing**




**CHECK PANEL OPERATION ABOVE & INDICATE RO SIZE**

Custom Door Size	Rough Size Opening Only	Jamb Depth	Net Deduct 1/2" Width & Height
<b>CUSTOM SIZED 6 PANEL FOLDING DOOR - Max Height is 8 ft</b>			
		5 1/4"	

**Standard**

**Optional**

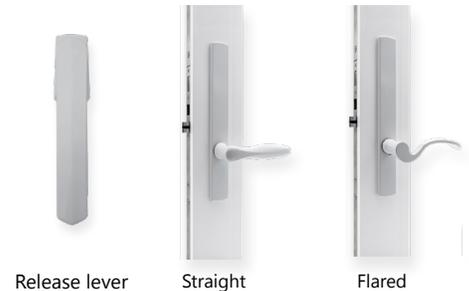

<b>Int/Ext Color:</b>	White	Beige	Black
<b>Exterior over White:</b>	Terra Tone	Bronze-Matte	Black-Matte
<b>Frame Style:</b>	Block	1" Fin	1 3/8" Fin
<b>Sill Color:</b>	Clear Anodized	Bronze Anodized	
<b>Sill Type:</b>	Standard	ADA*	

<b>Handle Style:</b>	Straight (standard)	Flared (optional)
<b>Handle Color:</b>	White	Brushed Chrome    Black
<b>Keyed Handle:</b>	No-Keyed	Keyed    Key Alike
<b>Release Lever:</b>	White	Brushed Chrome    Black
<b>Hinge:</b>	Brushed Stainless	Bronze Powder Coat
<b>Glass:</b>	EC+/Clear	Other _____

\*ADA and Zero U-Channel "flush" sill options should not be used in areas where water may come in direct contact with the door or landing area. See warranty for exclusions.

**Additional charges may apply:** Jobsite delivery is not available in all areas. Warranty is subject to following the provided installation instructions and using an adequate header for support. Cascade Windows does not warrant the installation of the product, or adjustment related requests.

**NOTE:** Regardless of sill type, the foundation must support the sill height variance requirement of 1/16" maximum across the entire sill length. In conjunction with the sill, the framing of the rough opening must be installed plumb, square, and true within 3/16". The header must be flat and designed to uphold the deflection requirement of not more than 1/8" over the entire length of the unsupported span when fully loaded. Side jambs and pocket framing must be constructed of a continuous flat solid surface that is plumb. The folding door and window system require an additional structural load calculation for the header, equal or greater than 7 pounds per square foot of rough opening, with same deflection criteria above. Cascade Windows does not warrant the installation of the product, or adjustment related requests.

Dealer Name: \_\_\_\_\_ Account# \_\_\_\_\_ Date: \_\_\_\_\_

Submitted by: \_\_\_\_\_ Phone: \_\_\_\_\_ Email: \_\_\_\_\_

Builder, Lot# & Sub Division: \_\_\_\_\_

Street Address: \_\_\_\_\_


City: \_\_\_\_\_ State \_\_\_\_\_ Zip Code \_\_\_\_\_ P.O.# \_\_\_\_\_

Check here if jobsite delivery \$125.00 delivery fee if delivering to a jobsite, not available in all areas.

Jobsite Contact: \_\_\_\_\_ Phone: \_\_\_\_\_


**CHECK PANEL OPERATION BELOW - Panel not to scale**

Net Sizes (Check One)	Rough Opening	Jamb Depth
<b>7 PANEL FOLDING DOOR - Max Height is 8 ft</b>		
247 1/4" x 95 1/2"	247 3/4" x 96	5 1/4"

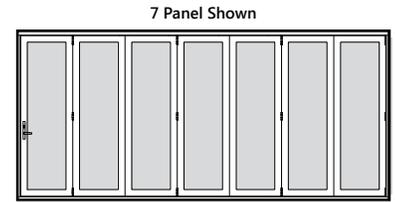


NOTE: 27.75" MAX SQUARE FEET

**7.0.7 Outswing**



Exterior panels not to scale

**7.7.0 Outswing**




**CHECK PANEL OPERATION BELOW - Panel not to scale**

Net Sizes (Check One)	Rough Opening	Jamb Depth
<b>7 PANEL FOLDING DOOR - Max Height is 8 ft</b>		
248 1/4" x 95 1/2"	248 3/4" x 96	5 1/4"

**CHECK PANEL OPERATION ABOVE & INDICATE RO SIZE**


Custom Door Size	Rough Size Opening Only	Jamb Depth	Net Deduct 1/2" Width & Height
<b>CUSTOM SIZED 7 PANEL FOLDING DOOR - Max Height is 8 ft</b>			
		5 1/4"	

**7.1.6 Outswing**




Exterior panels not to scale


**7.6.1 Outswing**




**7.3.4 Outswing**



**7.2.5 Outswing**



**7.5.2 Outswing**



**7.4.3 Outswing**



<b>Int/Ext Color:</b>	White	Beige	Black
<b>Exterior over White:</b>	Terra Tone	Bronze-Matte	Black-Matte
<b>Frame Style:</b>	Block	1" Fin	1 3/8" Fin
<b>Sill Color:</b>	Clear Anodized	Bronze Anodized	
<b>Sill Type:</b>	Standard	ADA*	

<b>Handle Style:</b>	Straight (standard)	Flared (optional)
<b>Handle Color:</b>	White	Brushed Chrome Black
<b>Keyed Handle:</b>	No-Keyed	Keyed Key Alike
<b>Release Lever:</b>	White	Brushed Chrome Black
<b>Hinge:</b>	Brushed Stainless	Bronze Powder Coat
<b>Glass:</b>	EC+/Clear	Other _____

\*ADA and Zero U-Channel "flush" sill options should not be used in areas where water may come in direct contact with the door or landing area. See warranty for exclusions.

**Additional charges may apply:** Jobsite delivery is not available in all areas. Warranty is subject to following the provided installation instructions and using an adequate header for support. Cascade Windows does not warrant the installation of the product, or adjustment related requests.

**NOTE:** Regardless of sill type, the foundation must support the sill height variance requirement of 1/16" maximum across the entire sill length. In conjunction with the sill, the framing of the rough opening must be installed plumb, square, and true within 3/16". The header must be flat and designed to uphold the deflection requirement of not more than 1/8" over the entire length of the unsupported span when fully loaded. Side jambs and pocket framing must be constructed of a continuous flat solid surface that is plumb. The folding door and window system require an additional structural load calculation for the header, equal or greater than 7 pounds per square foot of rough opening, with same deflection criteria above. Cascade Windows does not warrant the installation of the product, or adjustment related requests.