

Dealer Name: \_\_\_\_\_ Account# \_\_\_\_\_ Date: \_\_\_\_\_

Submitted by: \_\_\_\_\_ Phone: \_\_\_\_\_ Email: \_\_\_\_\_



Builder, Lot# & Sub Division: \_\_\_\_\_

Street Address: \_\_\_\_\_

City: \_\_\_\_\_ State \_\_\_\_\_ Zip Code \_\_\_\_\_ P.O.# \_\_\_\_\_

Check here if jobsite delivery \$125.00 delivery fee if delivering to a jobsite, not available in all areas.

Jobsite Contact: \_\_\_\_\_ Phone: \_\_\_\_\_

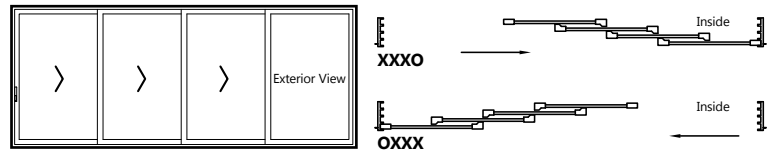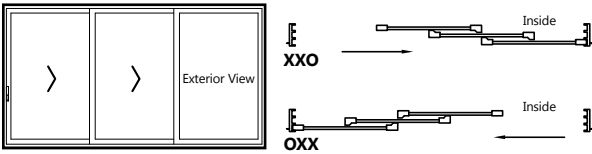

**3750 MULTI-SLIDE DOOR - 3 3/4" WIDE SASH**

Handing (Check One)	Net Sizes (Check One)	Rough Opening	Jamb Depth
<b>FRAME 3750 - Max Height is 10 ft</b>			
<b>3-Panel XXO</b>	104 5/16" x 95 1/2"	104 13/16" X 96"	7 11/16"
	119 1/2" x 95 1/2"	120 x 96"	7 11/16"
	140 5/16" x 95 1/2"	104 13/16" X 96"	7 11/16"
	176 5/16" x 95 1/2"	176 13/16" x 96"	7 11/16"
<b>3-Panel OXX</b>	104 5/16" x 95 1/2"	104 13/16" X 96"	7 11/16"
	119 1/2" x 95 1/2"	120 x 96"	7 11/16"
	140 5/16" x 95 1/2"	104 13/16" X 96"	7 11/16"
	176 5/16" x 95 1/2"	176 13/16" x 96"	7 11/16"
<b>4-Panel XXXO</b>	137" x 95 1/2"	137 1/2" X 96"	10 3/16"
	185" x 95 1/2"	185 1/2" X 96"	10 3/16"
	233" x 95 1/2"	233 1/2" X 96"	10 3/16"
<b>4-Panel OXXX</b>	137" x 95 1/2"	137 1/2" X 96"	10 3/16"
	185" x 95 1/2"	185 1/2" X 96"	10 3/16"
	233" x 95 1/2"	233 1/2" X 96"	10 3/16"

**2750 MULTI-SLIDE DOOR - 2 3/4" WIDE SASH**

Handing (Check One)	Net Sizes (Check One)	Rough Opening	Jamb Depth
<b>FRAME 2750 - Max Height is 8 ft - Black over Black not available</b>			
<b>3-Panel XXO</b>	104 1/2" x 95 1/2"	105 x 96"	7 11/16"
	140 1/2" x 95 1/2"	141 x 96"	7 11/16"
<b>3-Panel OXX</b>	104 1/2" x 95 1/2"	105 x 96"	7 11/16"
	140 1/2" x 95 1/2"	141 x 96"	7 11/16"
<b>4-Panel XXXO</b>	137 9/16" x 95 1/2"	138 1/16" x 96"	10 3/16"
	185 9/16" x 95 1/2"	186 1/16" x 96"	10 3/16"
<b>4-Panel OXXX</b>	137 9/16" x 95 1/2"	138 1/16" x 96"	10 3/16"
	185 9/16" x 95 1/2"	186 1/16" x 96"	10 3/16"

**FOR USE FOR CUSTOM SIZED DOOR ONLY**

Provide rough opening size only - Net deduction 1/2" width & height

Handing (Check One)		
SASH 3750	SASH 2750	Jamb Depth
<b>3-Panel XXO</b>		7 11/16"
<b>3-Panel OXX</b>		7 11/16"



Handing (Check One)		
SASH 3750	SASH 2750	Jamb Depth
<b>4-Panel XXXO</b>		10 3/16"
<b>4-Panel OXXX</b>		10 3/16"

**Int/Ext Color:** White Beige Black  
**Exterior over White:** Terra Tone Bronze-Matte Black-Matte  
**Frame Style:** Block 1" Fin 1 3/8" Fin  
**Sill Color:** Clear Anodized Bronze Anodized

**Handle Style:** Flush (standard) Signature  
**Handle Color:** White Brushed Chrome Black  
**Keyed Handle:** No-Keyed Keyed Key Alike  
**Glass:** EC+/Clear Other

**Additional charges may apply:** Jobsite delivery is not available in all areas. Warranty is subject to following the provided installation instructions and using an adequate header for support. Cascade Windows does not warrant the installation of the product, or adjustment related requests.

**NOTE:** Regardless of sill type, the foundation must support the sill height variance requirement of 1/16" maximum across the entire sill length. In conjunction with the sill, the framing of the rough opening must be installed plumb, square, and true within 3/16". The header must be flat and designed to uphold the deflection requirement of not more than 1/8" over the entire length of the unsupported span when fully loaded. Side jambs and pocket framing must be constructed of a continuous flat solid surface that is plumb. The folding door and window system require an additional structural load calculation for the header, equal or greater than 7 pounds per square foot of rough opening, with same deflection criteria above.